



WE DO BAMBOO Product Catalog

**Engineered Precision from the
Heart of Africa.**

We Do Bamboo is the first and only professional manufacturer of bamboo composite materials in Kenya, combining Dutch engineering with Kenyan manufacturing excellence. From the heart of East Africa, we produce high-performance decking, cladding, flooring, and architectural wall panels for global construction markets.

Made in Kenya • Built for the World
www.we-do-bamboo.com



Sustainable



Eco-Friendly



Renewable



Locally-Sourced





Complete Engineered Bamboo Composite Solutions


Engineered for architects, builders, and landscape professionals seeking reliable, high-performance materials. We deliver sustainable, durable bamboo composites that outperform traditional wood and support a greener future.




Composite Decking



Composite Flooring

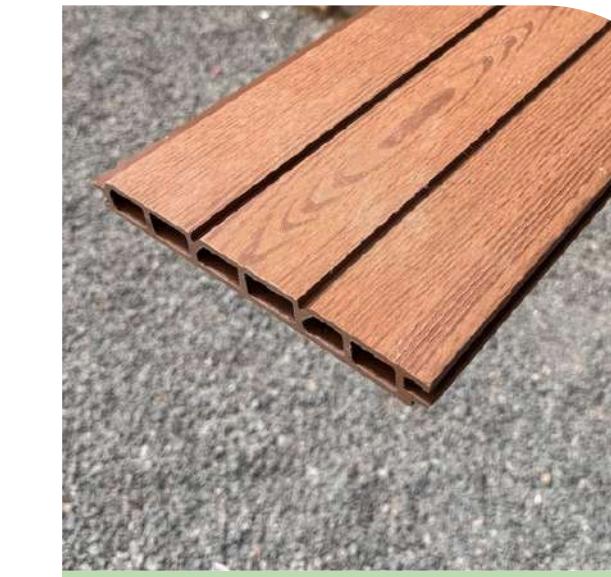

Cladding Profiles

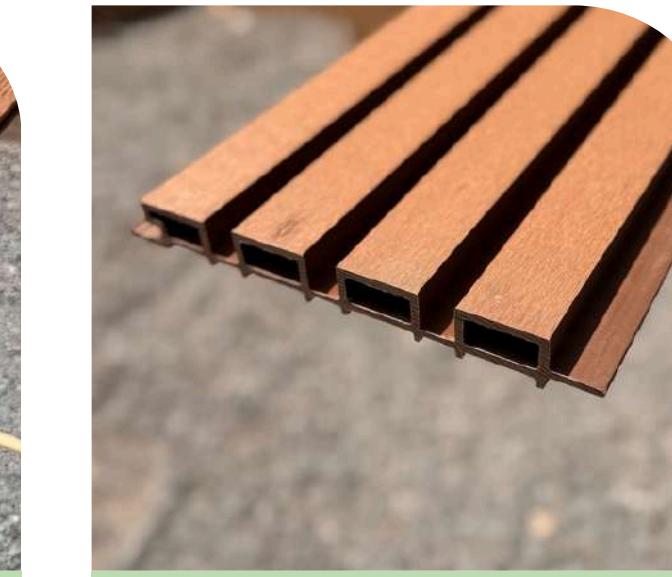

Fluted Wall Panels



All available in 4 colours:

1. Natural Sand
2. Savannah Gold
3. Natural Teak
4. Dark Espresso

Composite Decking Boards

Premium Decking Profile


Engineered for outdoor resilience. Our decking boards offer slip resistance and superior stability in varying climates, making it the preferred choice for commercial projects and residential installations.

Our bamboo composite decking is designed to outperform timber in durability, dimensional stability, and maintenance costs. Unlike wood, it does not warp, splinter, or require annual oiling.


Why Bamboo Composite?

- High resistance to moisture, insects, and UV. Lower maintenance than hardwood or softwood
- Higher structural stability in hot and humid climates
- Reliable quality through engineered formulation

Surface Options Woodgrain, Smooth Sanded
Colours Natural Sand, Savannah Gold, Natural Teak, Dark Espresso

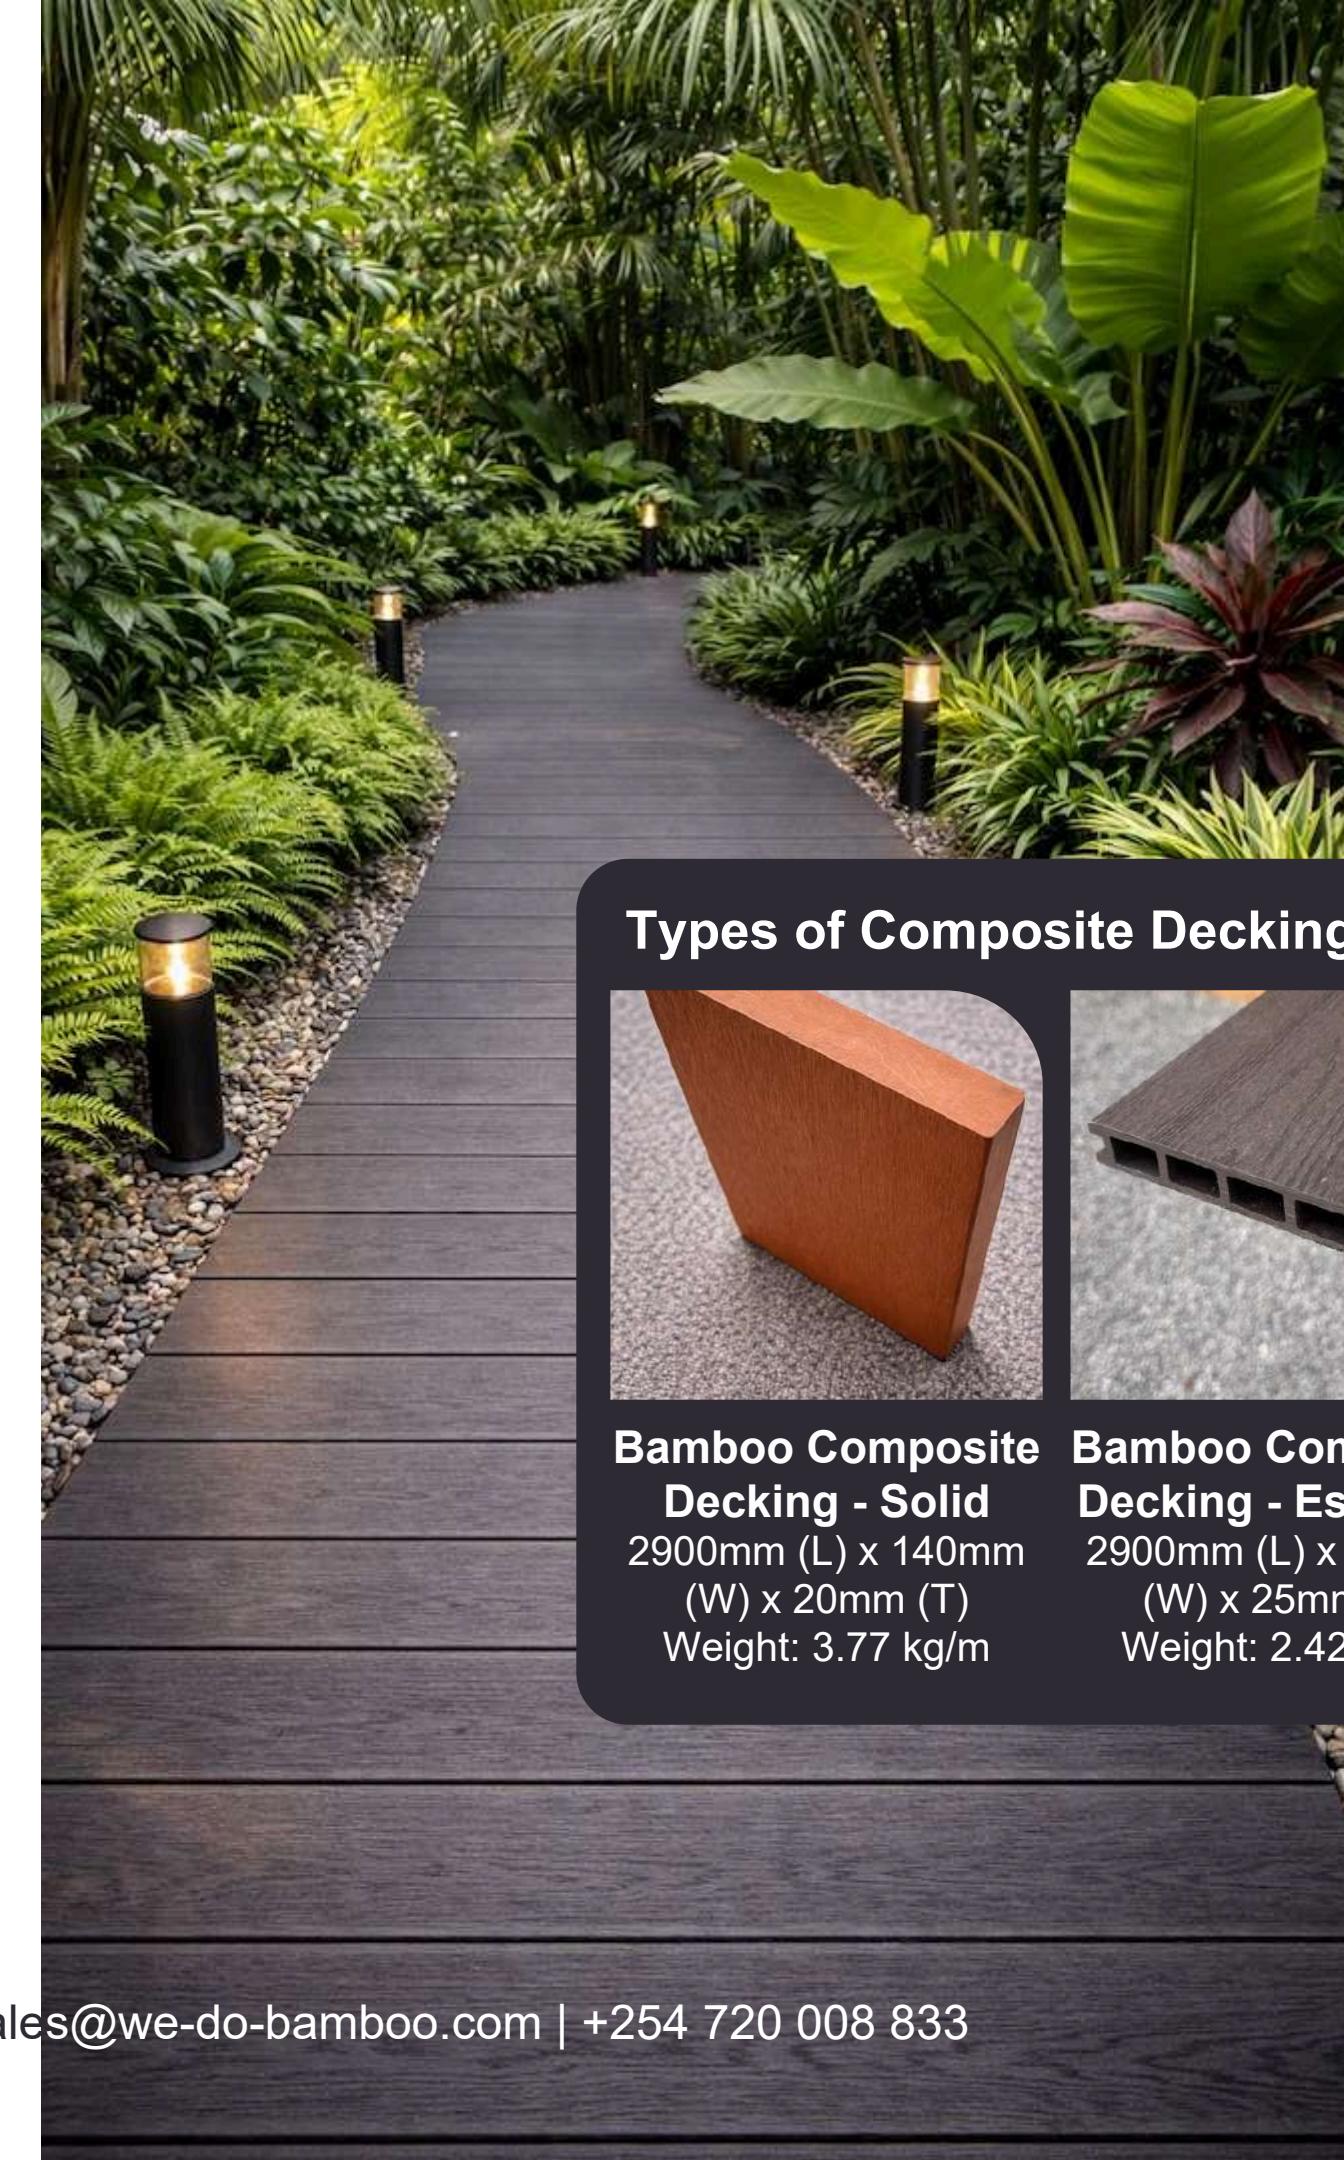

Types of Composite Decking Boards

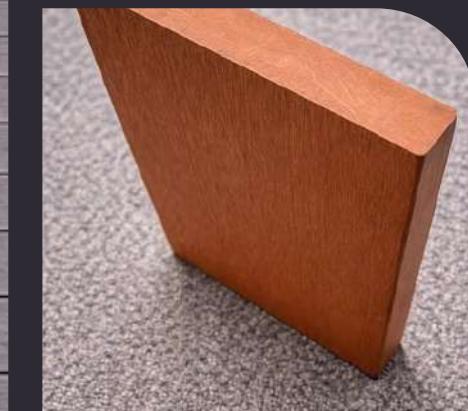

Bamboo Composite Decking - Solid
2900mm (L) x 140mm (W) x 20mm (T)
Weight: 3.77 kg/m



Bamboo Composite Decking - Essential
2900mm (L) x 140mm (W) x 25mm (T)
Weight: 2.42 kg/m



Bamboo Composite Decking - Core
2900mm (L) x 150mm (W) x 25mm (T)
Weight: 2.98 kg/m

Composite Flooring - Elegant

Both for interior and exterior - Engineered Comfort With Natural Warmth

Our bamboo composite flooring brings the premium look of timber with the resilience of a modern engineered material. Ideal for wholesalers, builders, and interior brands seeking a robust and sustainable alternative to hardwood floors.

Standard Dimensions 2900mm(L) x 140mm(W) x 23mm (T)


Surface Options Woodgrain, Smooth Sanded

Colours Natural Sand, Savannah Gold, Natural Teak,
Dark Espresso

Weight Total weight (kg/m) = 2.83

Key Advantages

- Resistant to moisture and termite damage (common issues in East Africa)
- Fade-resistant and highly stable
- Quick installation system reduces labor time
- Sustainable materials, manufactured in Kenya

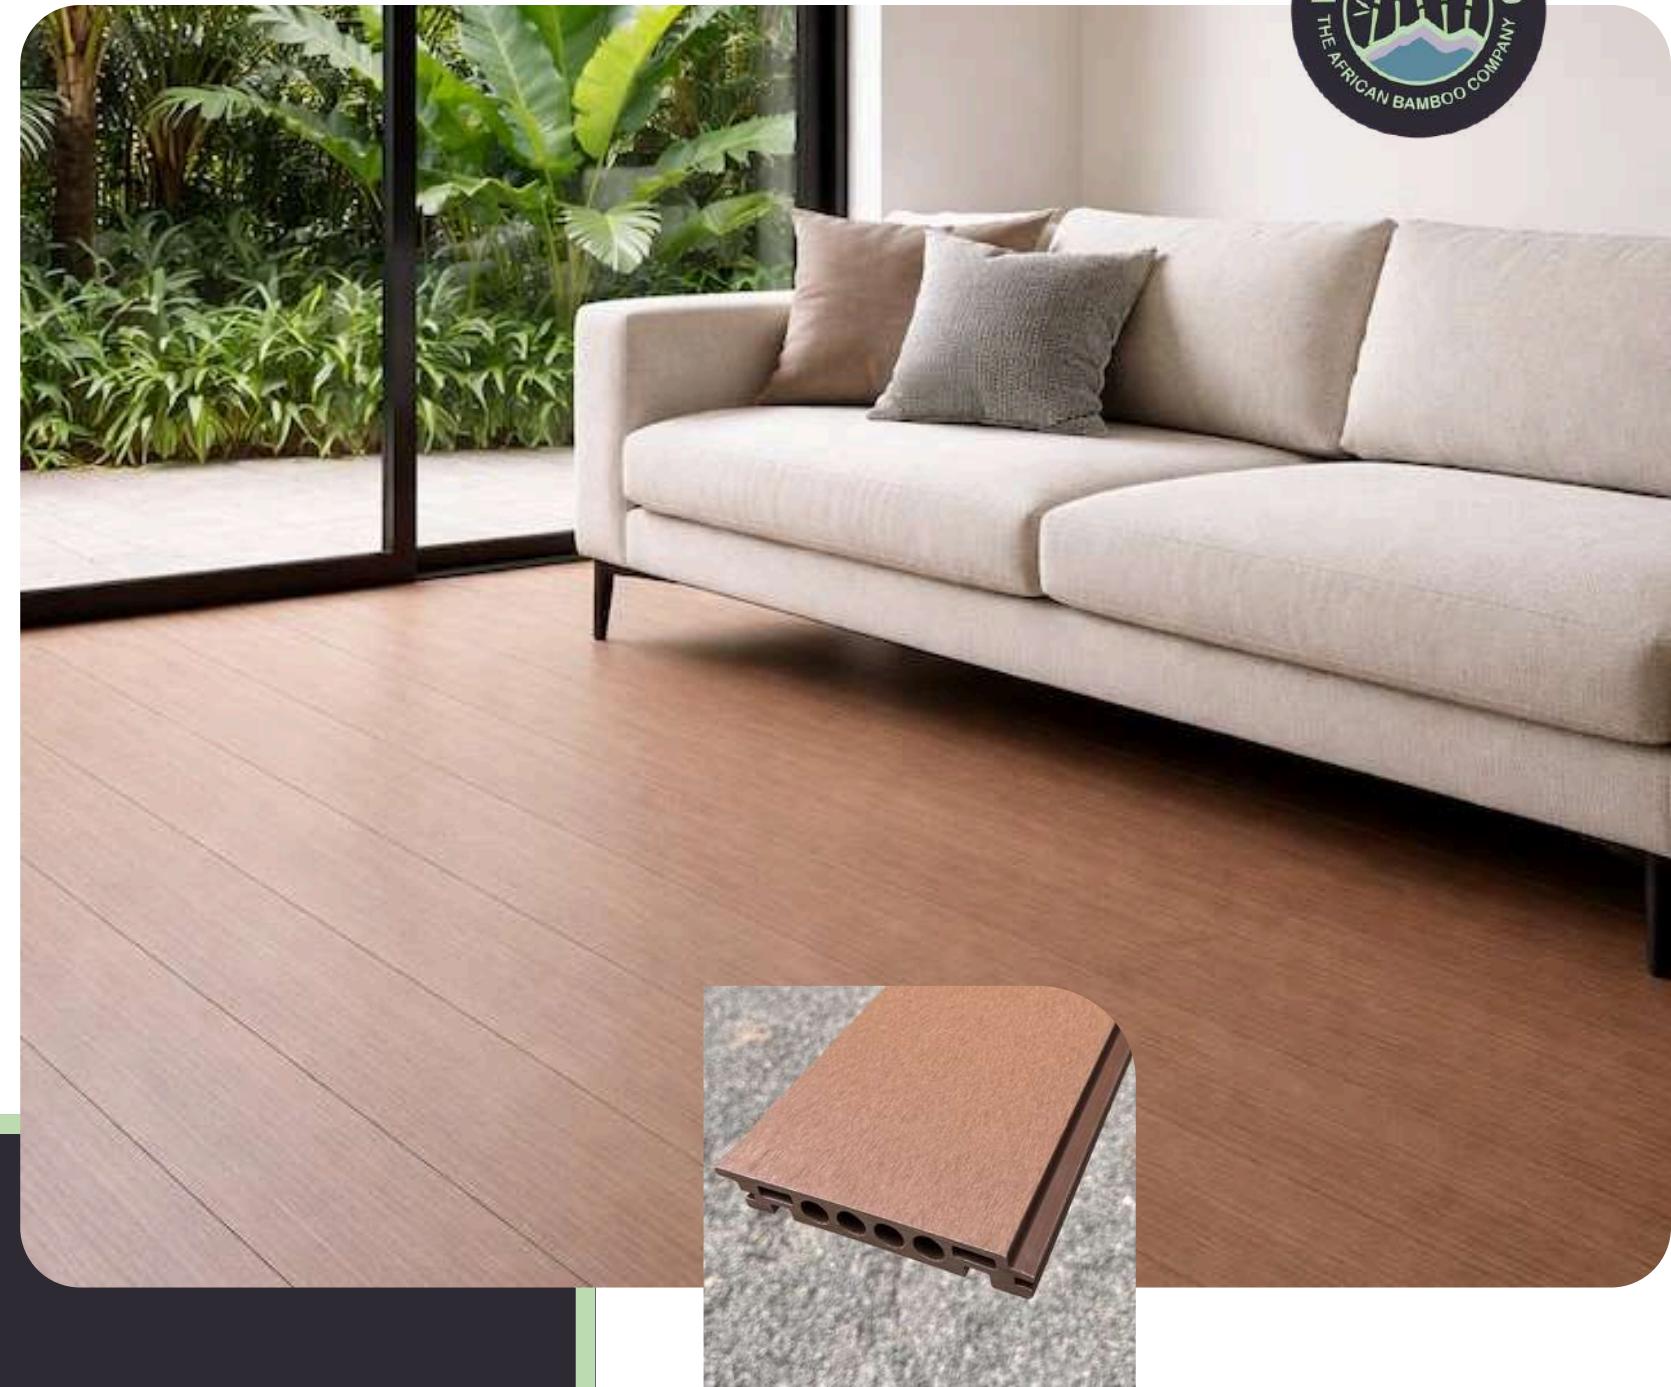

**Bamboo Composite
Decking - Elegant**
2900mm (L) x 140mm
(W) x 23mm (T)
Weight: 2.83 kg/m







Composite Cladding Profiles

Modern Facade Solutions for Africa and Beyond.

Our cladding profiles are engineered to withstand extreme temperature fluctuations while retaining their rich, natural appearance. Ideal for commercial buildings, residential developments, and architectural studios.

Slatted Cladding Panel

Application	Decorative facades, screens, ventilated walls
Appearance	Three slim slats per board, architectural texture
Connection	Closed installation system (hidden fasteners)
Advantages	Lightweight, modern ribbed aesthetic

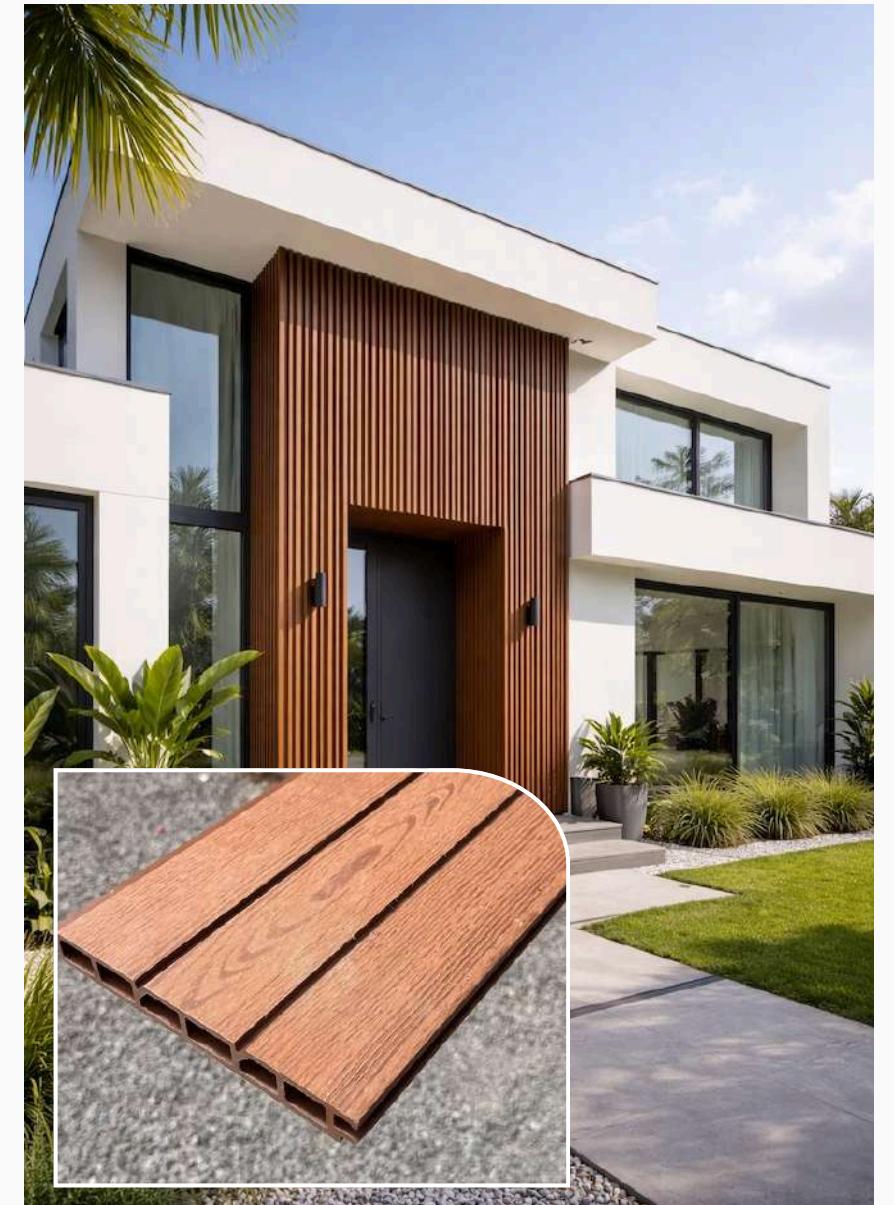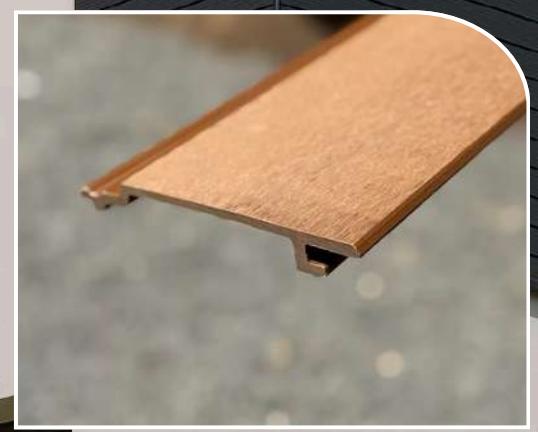

Wide Overlap Cladding Board

Application	Exterior facades, soffits
Appearance	Clean, wide boards with seamless overlap
Connection	Tongue-and-groove engineered joint
Advantages	Modern look, stable connection, great for large surfaces

Made in Kenya for global performance requirements; stable, low-maintenance, and visually striking.

Wide Overlap

Weight 1.6 kg/m

Slatted Panel


Weight 3.02 kg/m

Fluted Wall Panels

Premium Architectural Texture

Our fluted panels deliver modern, rhythmic detailing for feature walls. Lightweight yet durable, they bring visual depth to both interior and protected exterior spaces.

Engineered for high-end interiors and demanding outdoor environments. These premium fluted panels are fully water-resistant and UV-stable, making them suitable for feature walls, façades, and architectural accents in both residential and commercial projects.

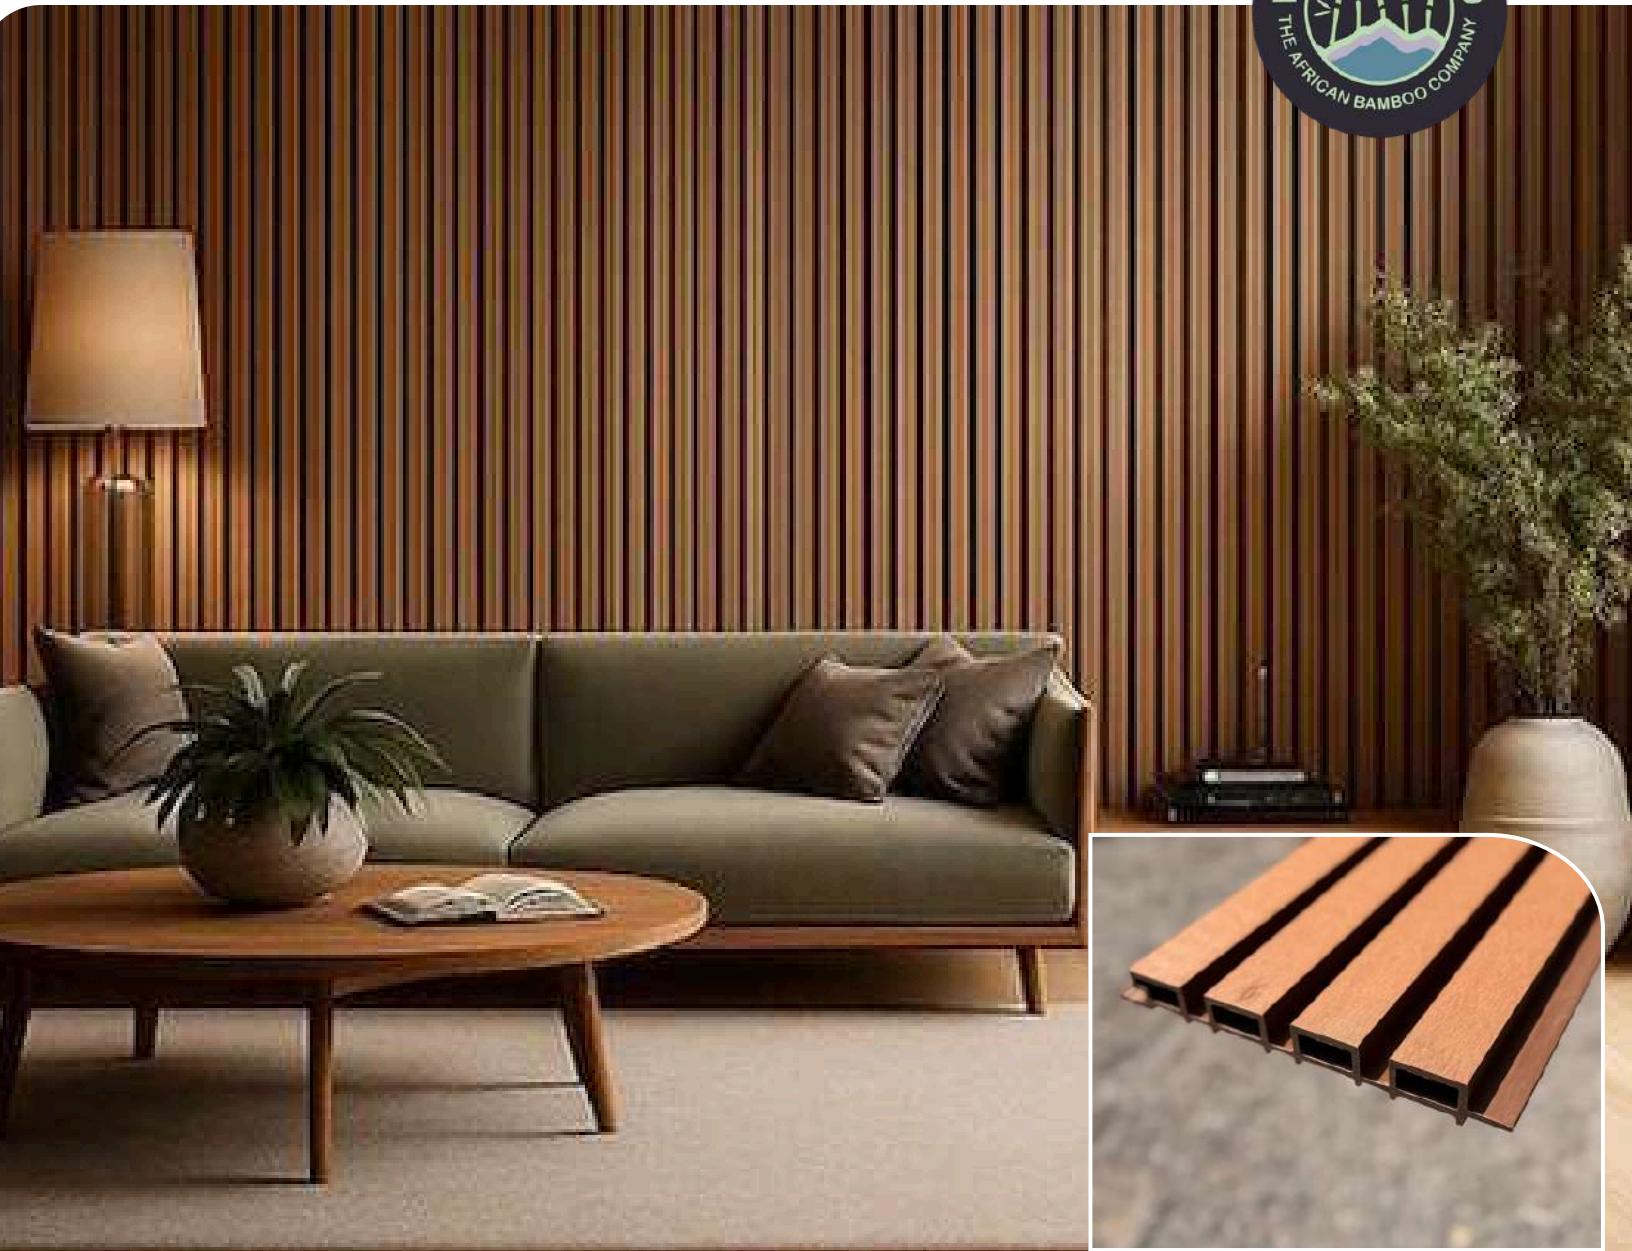

Specifications

- Panel Size: 2800mm x 219mm
- Flute Depth: 14mm
- Spacing: 13.5mm between flutes
- Surface Options: Woodgrain, Smooth Sanded
- Colours: Natural Sand, Savannah Gold, Natural Teak, Dark Espresso
- Weight: 2.91 kg/m

Fluted Panel

Weight 2.91 kg/m



Technical Specifications

Material Composition: Bamboo–polymer composite produced through co-extrusion. Engineered for improved durability, colour stability, and resistance to moisture compared to traditional timber-based materials.

Typical Physical Properties

- High density composite structure for improved rigidity
- Low moisture absorption, contributing to dimensional stability
- Good resistance to weathering under typical outdoor conditions
- Enhanced surface protection through co-extrusion

Note: Actual values may vary within normal production tolerances.

Thermal & Dimensional Behaviour: Designed to maintain stability across seasonal temperature fluctuations. Allowances for expansion and contraction should be included during installation.

Fire Behaviour: Bamboo composite materials generally exhibit a slower ignition rate and more controlled flame spread compared to untreated natural timber, due to the stabilising effect of the polymer matrix. Fire performance varies by region and installation method.

Maintenance Guidance: Low-maintenance surface requiring only periodic cleaning with mild detergent and water. No specialised treatments are typically necessary under normal use.

Quality Standards: Manufactured under controlled processes with routine batch checks.





Pricing & Lead Times

We offer reliable supply from our Kenyan production facility, ensuring stable pricing and short lead times for distributors and project partners.

<u>Product Category</u>	Length		Width		Thickness	Surface Area per Unit M ²	MOQ (Pcs)	Std Lead Time
Composite Decking - Essential	2900mm	x	140mm	x	25mm	0,406	150	1 Week
Composite Decking - Core	2900mm	x	150mm	x	25mm	0,435	150	1 Week
Composite Decking - Solid	2900mm	x	140mm	x	20mm	0,406	150	1 Week
Composite Decking - Elegant	2900mm	x	140mm	x	23mm	0,406	150	1 Week
Composite Cladding - Slatted panel	2900mm	x	205mm	x	23mm	0,595	150	1 Week
Cladding - Wide Overlap	2900mm	x	154mm	x	21mm	0,446	150	1 Week
Fluted Wall Panels	2800mm	x	219mm	x	14mm	0,613	150	1 Week

Shipping Terms: As East Africa's only bamboo composite manufacturer, we offer unmatched responsiveness, flexible MOQs for wholesalers and retailers, and steady year-round production capacity.

Packaging & Logistics



Standard Packaging

Products are supplied in protective wrapping to prevent scratches and moisture during handling and transport.

Boards are bundled in manageable units suitable for on-site unloading.



Local Delivery Options

We offer flexible delivery within Nairobi and surrounding regions through trusted logistics partners. Orders can also be collected directly from our facility in Sigona.




Handling & Storage

Bundles are forklift-friendly and clearly labelled for easy identification. Products should be stored on a flat, dry surface and kept covered until installation.



Quality Checks

Each batch undergoes routine inspection to ensure consistent dimensions, colour, and surface finish.

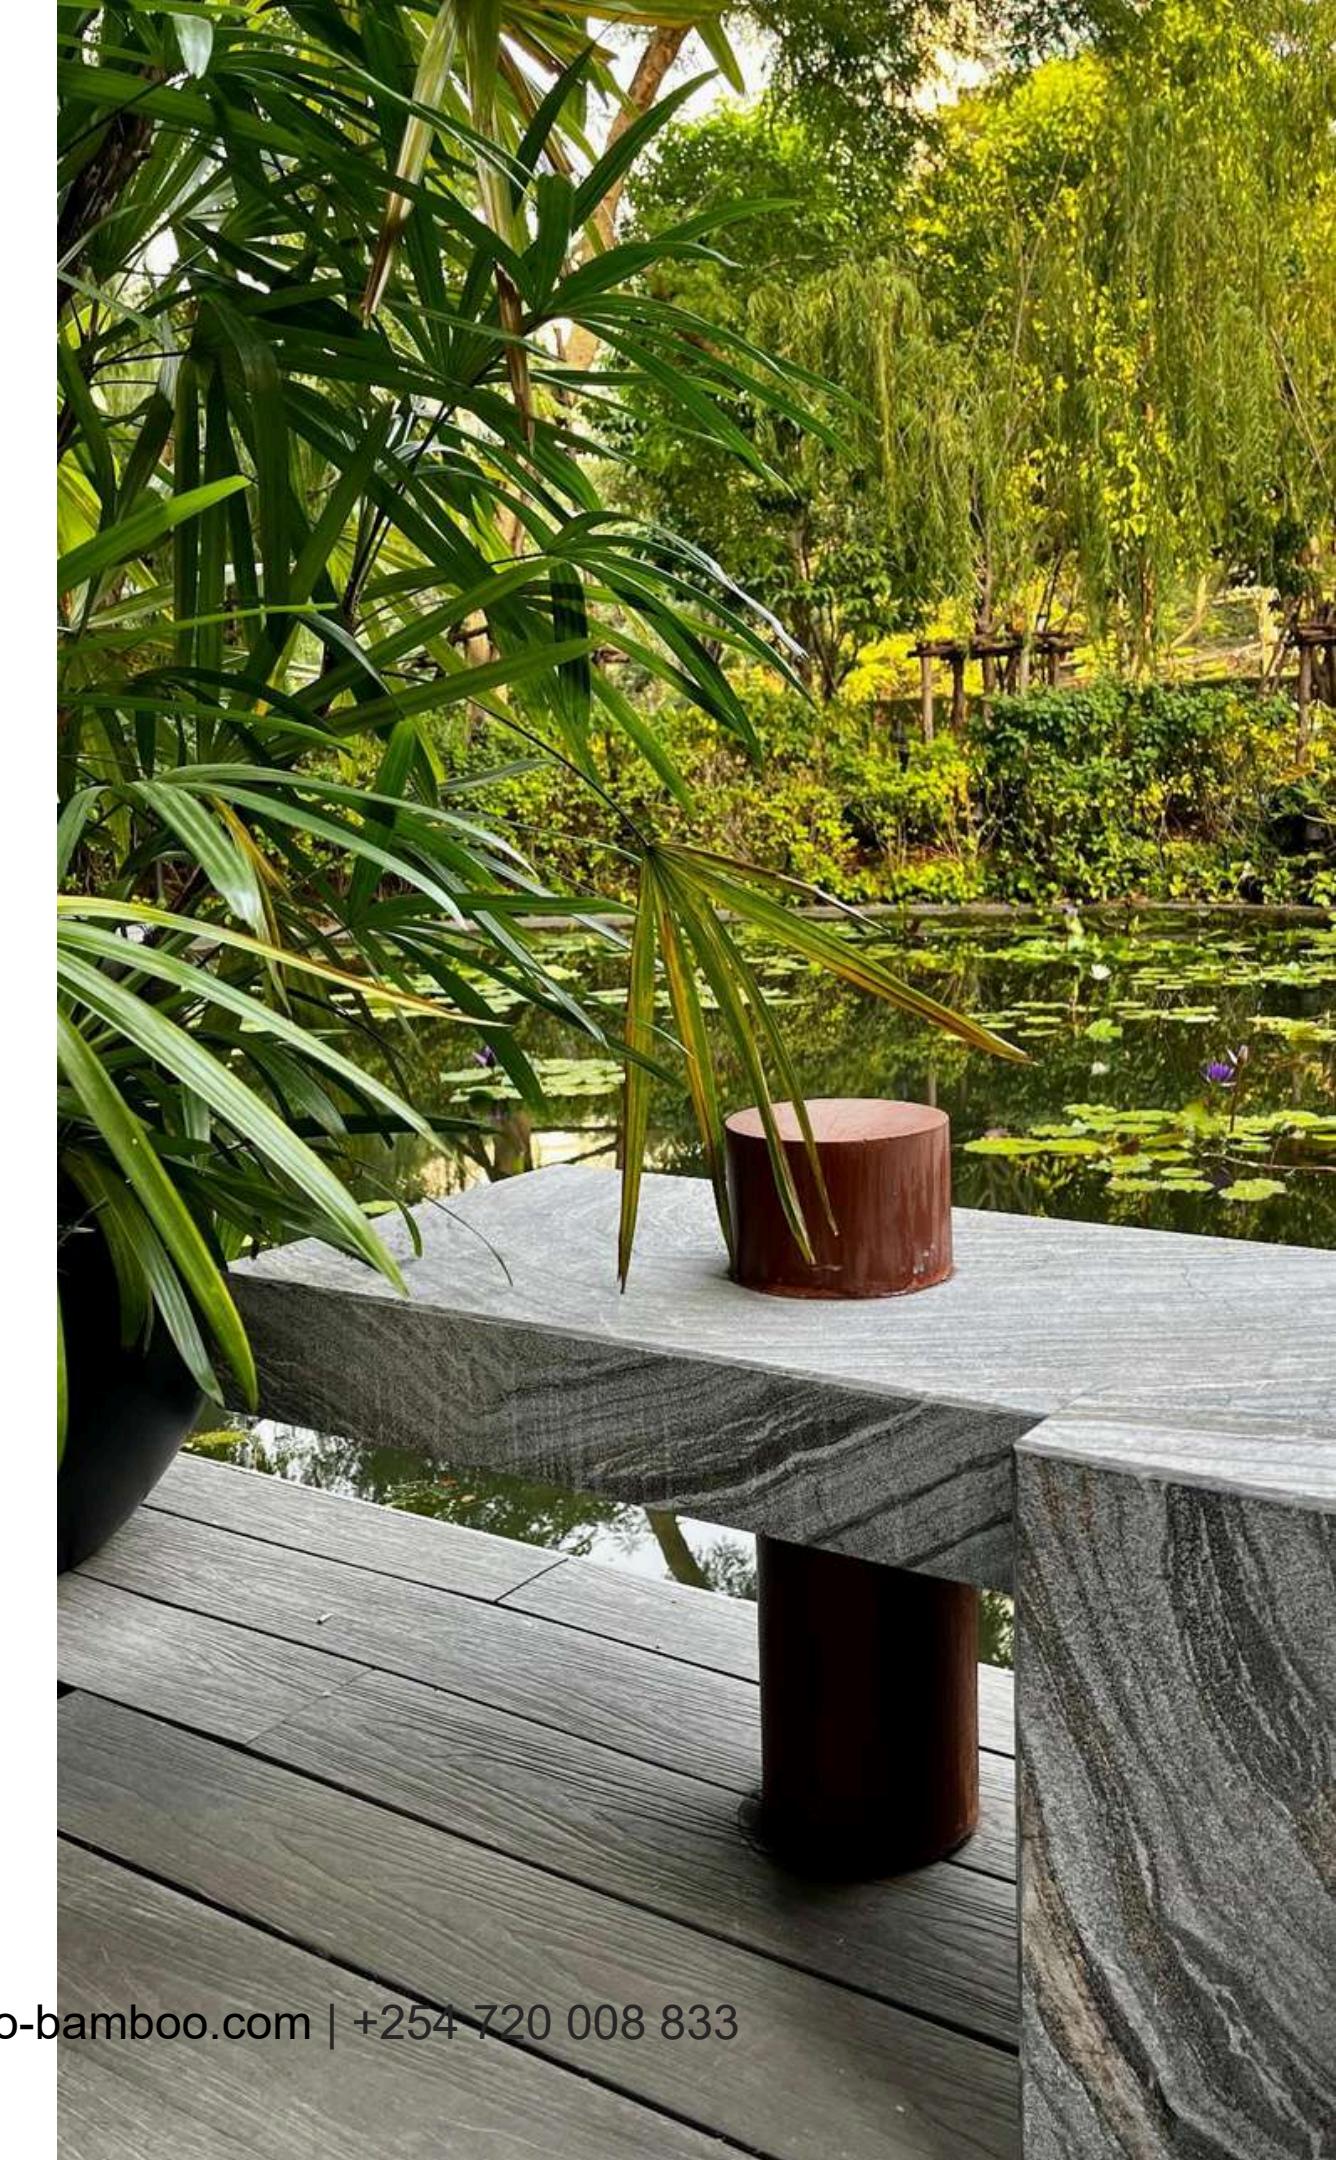



Partner with Kenya's Premier Bamboo Composite Manufacturer

WeDoBamboo / WeDoBambusaLTD

P.O. Box 1009 – 00502

Company number PVT-KAUDLYKK

Factory location: Sigona, Rungiri, Kenya

Email: sales@we-do-bamboo.com

Phone: +254 720 008 833

Web: www.we-do-bamboo.com

Made in Kenya • Built for the World

www.we-do-bamboo.com | sales@we-do-bamboo.com | +254 720 008 833



Scan QR for WhatsApp

